



## Small Dry Mix Concrete Batch Machine 30m3/h 50m3/h 75m3/h 90m3/h Stationary Concrete Batching Plant

Our Product Introduction

for more products please visit us on [sunnyconcretebatchingplant.com](http://sunnyconcretebatchingplant.com)


### Basic Information

- Place of Origin: Hunan
- Brand Name: SUNNY
- Model Number: HSZ75
- Minimum Order Quantity: 1 set
- Price: USD 110000-150000/ SET
- Packaging Details: container
- Delivery Time: 25-30 days
- Payment Terms: L/C, T/T, D/P, Western Union, MoneyGram
- Supply Ability: 20 Set/Sets per Month



### Product Specification

- Maaterial: Cement, Crushed Stone, Sands And So On
- Application: Building Works,Construction Projects,bridges,docks,airport
- Control System: Automatic PLC Control,totally Automatic
- Productivity:  $\leq 75\text{m}^3/\text{h}$
- Mixer: JS1500 Twin-shaft Concrete Mixer
- Warranty: 12 Months
- Condition: New
- After-sales Service Provided: Engineers Available To Service Machinery Overseas,Online Support,Video Technical Support,Field Installation,commissioning And Training
- Highlight: **Small Dry Mix Concrete Batching Plant, Stationary Concrete Batching Plant**

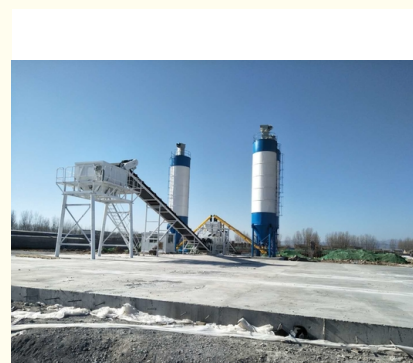

## Product Description

### High Efficiency 75m<sup>3</sup>/h Stationary Concrete Batching Plant Concrete Mixing Plant

One of the key features of the HZS75 batching plant is its modular design, which allows for easy installation, transportation, and relocation. The plant consists of several modular units, including the mixing console, aggregate batching machine, cement silo, screw conveyor, and control system. This modular design makes it convenient to assemble and disassemble the plant, reducing setup time and enabling quick deployment to different job sites.

The HZS75 batching plant incorporates a twin-shaft concrete mixer, which ensures thorough mixing of aggregates, cement, water, and additives. The mixer operates at a high speed, promoting efficient mixing and homogeneity of the concrete mixture. It is equipped with wear-resistant liners to enhance its durability and minimize maintenance requirements.

Name of parameter	HZS60	HZS90	HZS120	HZS180	HZS240
Theoretical productivity	60 M <sup>3</sup> /h	90 M <sup>3</sup> /h	120 M <sup>3</sup> /h	180 M <sup>3</sup> /h	240m <sup>3</sup> /h
Model of mixer	JS1000	JS1500	JS2000	JS3000	JS4000
Mixing motor power	2x18.5Kw	2x30Kw	2x37Kw	2x55Kw	2*75Kw
Cycle period	60s	60s	60s	60s	60s
Volume of mixer	1000L	1500L	2000L	3000L	4000L
Unloading height	4.0m	4.0m	4.0m	4.0m	4.0m
Measuring range and precision of aggregate	(600-2000)≤±2%	(700-2400)≤±2%	(1000-3600)≤±2%	(1600-4800)≤±2%	(1600-4800)≤±2%
Measuring range and precision of cement	(300-1200)≤±1%	(300-1200)≤±1%	600-1800)≤±1%	(800-2400)≤±1%	(800-2400)≤±1%
Measuring range and precision of coal ash	(200-600)≤±1%	(200-600)≤±1%	(300-900)≤±1%	(400-1200)≤±1%	(400-1200)≤±2%
Measuring range and precision of water	200-600)≤±1%	(200-600)≤±1%	(200-700)≤±1%	(360-1200)≤±1%	(360-1200)≤±1%
Measuring range and precision of admixture	20-60)≤±1%	(20-60)≤±1%	(30-100)≤±1%	(36-120)≤±1%	(36-120)≤±1%



Hunan Sunny Intelligent Machinery Co.,LTD.

+86 19118921276

amy@hnsunny.com.cn

sunnyconcretebatchingplant.com

Construction Machinery Supporting Industrial Park, High-tech Zone, Ningxiang City, Hunan Province