



## Small Asphalt Hot Mix Plant Asphalt Mixing Plant Batch Type 60 To 80 T/Hr

Our Product Introduction

for more products please visit us on [sunnyconcretebatchingplant.com](http://sunnyconcretebatchingplant.com)


### Basic Information

- Place of Origin: Hunan
- Brand Name: Sunny
- Model Number: LB1000
- Minimum Order Quantity: 1 set
- Price: USD250,000-50,0000 PER SET
- Packaging Details: FULL CONTAINER
- Delivery Time: 20-35DAYS
- Payment Terms: L/C, T/T, Western Union, MoneyGram
- Supply Ability: 50 SET PER MONTH



### Product Specification

- Warranty: 1 Year
- After-sales Service Provided: Engineers Available To Service Machinery Overseas
- Type: Asphalt Mixing Plant
- Application: High-grade Asphalt Road Paving, Construction Areas, Road Construction Asphalt Plant
- Control System: PLC+colorized Touching Screen
- Highlight: **hot mix asphalt plant, Asphalt Mixing Plant Batch Type, Small Asphalt Mixing Plant**

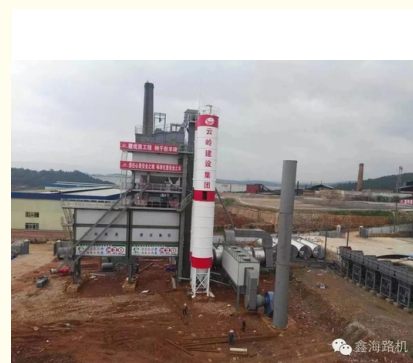

## Product Description

Small Asphalt Hot Mix Plant Asphalt Mixing Plant Batch Type 60 to 80 T/hr asphalt plant spare parts


**Mixing Unit:** The mixing unit incorporates a paddle mixer or a drum mixer to blend the aggregates, filler, and bitumen thoroughly. The mixing process ensures that all components are uniformly distributed, resulting in a consistent and homogenous asphalt mixture.

**Control System:** The control system is the central command unit of the asphalt mixing plant. It allows operators to monitor and control the entire production process, including temperature settings, mixing ratios, and material flow. The control system ensures precise control and adjustment to meet specific mix design requirements.

**Storage Silos:** The finished asphalt mixture is typically stored in storage silos before it is loaded onto trucks or transported to the construction site. The silos provide temporary storage and safeguard the quality of the asphalt mixture.

Asphalt mixing plants come in various sizes and configurations, catering to different project requirements. They can be stationary or mobile, depending on the needs of the project. Stationary plants are suitable for long-term projects, while mobile plants offer flexibility and easy relocation.

Model	Rated Output	Mixer Capacity	Dust removal effect	Total power	Fuel consumption	Fire coal	Weighing accuracy	Hopper Capacity	Dryer Size
LB1000	80t/h	1000kg	≤20 mg/Nm³	264kw	5.5-7 kg/t	10kg/t	aggregate; ±5‰	4×8.5m³	φ1.75m×7m
LB1300	100t/h	1300kg		264kw			powder; ±2.5‰	4×8.5m³	φ1.75m×7m
LB1500	120t/h	1500kg		325kw				4×8.5m³	φ1.75m×7m
LB2000	160t/h	2000kg		483kw			asphalt; ±2.5‰	5×12m³	φ1.75m×7m

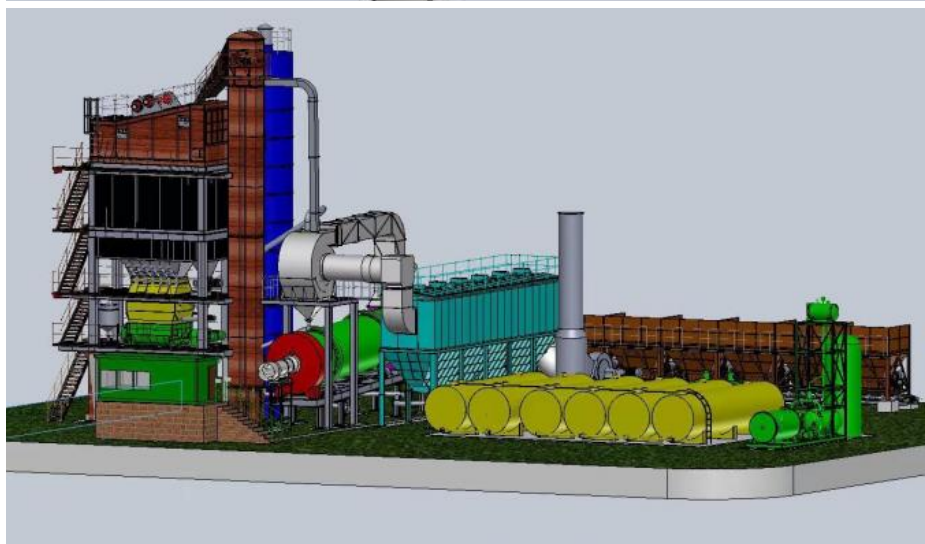

Hunan Sunny Intelligent Machinery Co.,LTD.

+86 19118921276

amy@hnsunny.com.cn

[sunnyconcretebatchingplant.com](http://sunnyconcretebatchingplant.com)

Construction Machinery Supporting Industrial Park, High-tech Zone, Ningxiang City, Hunan Province

