

Stationary Asphalt Batch Mix Plant Machine Process

Basic Information

- Place of Origin:
- Brand Name:
- Model Number:
- Minimum Order Quantity:
- Price:

Hunan

Sunny

1 Year

- Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:
- LB1000 1 set USD250,000-50,0000 PER SET FULL CONTAINER 20-35DAYS L/C, T/T, Western Union, MoneyGram 50 SET PER MONTH



Product Specification

- Warranty:
- After-sales Service . Provided:
- Type:
- Application:
- Control System:
- Highlight:

Overseas
Asphalt Mixing Plant
High-grade Asphalt Road Paving,Construction Areas,Road Construction Asphalt Plant

Engineers Available To Service Machinery

- PLC+colorized Touching Screen
 - asphalt batch mix plant, asphalt batch mix plant for sale, asphalt batch mix plant process



Product Description

Stationary asphalt batching mixing plant machine for sale


The 80tph asphalt mixer plant is a compact and versatile asphalt mixing plant designed for medium-scale asphalt production. It offers a range of features and capabilities that make it suitable for various road construction projects. Here is a description of the typical characteristics of an 80tph asphalt mixer plant:

Production Capacity: The 80tph asphalt mixer plant has a production capacity of 80 tons per hour. This capacity allows for efficient completion of medium-sized projects, such as rural road construction, parking lots, and small-scale infrastructure development.

Mixing System: The plant typically incorporates a twin-shaft paddle mixer or a drum mixer. The mixing system ensures thorough blending of aggregates, filler, and bitumen, resulting in a high-quality asphalt mixture with excellent consistency and uniformity.

Precise Measurement and Control: The 80tph asphalt mixer plant is equipped with accurate weighing systems that ensure precise dosing of aggregates, filler, and bitumen. The control system allows for adjustments in mixing ratios and temperature settings, enabling the production of various asphalt mix designs while maintaining consistent quality.

INIODEI	Rated Output	Capacit v	Dust removal effect	r	consumpti	I .	accuracy	Capacity	Dryer Size
M	80t/h			264k w			11.7%		φ1.75m×7 m
-		1300kg		264k w	5.5-7 kg/t	10kg/t	±2.5‰		φ1.75m×7 m
LB150 0	120t/h	1500kg	≤20 mg/Nm³	325k w				4×0.50	φ1.75m×7 m
LB200 0	160t/h	2000kg		483k w		1	asphalt; ±2.5‰	DX 12111°	φ1.75m×7 m

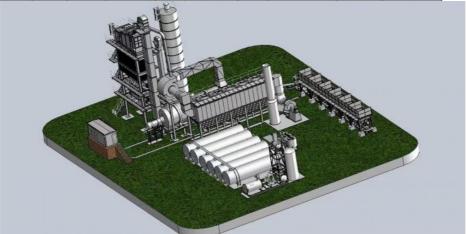



与三カ智工 Hunan Sunny Intelligent Machinery Co.,LTD.

🕓 +86 19118921276 🔄 amy

amy@hnsunny.com.cn

© sunnyconcretebatchingplant.com

Construction Machinery Supporting Industrial Park, High-tech Zone, Ningxiang City, Hunan Province