




Mobile Concrete Placing Boom Pump Portable

Our Product Introduction

for more products please visit us on sunnyconcretebatchingplant.com

Basic Information

- Place of Origin: Hunan
- Brand Name: Sunny
- Model Number: HG28
- Minimum Order Quantity: 1 set
- Price: USD6000-10000 PER SET
- Delivery Time: 20-35DAYS
- Payment Terms: L/C, T/T, Western Union, MoneyGram
- Supply Ability: 50 SET PER MONTH

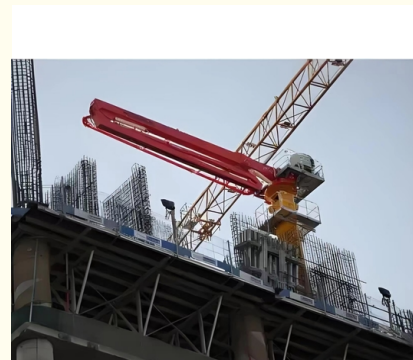

Product Specification

- Condition: New
- Warranty: 1 Year
- After-sales Service Provided: Engineers Available To Service Machinery Overseas
- Application: Construction Engineering
- Keyword: Concrete Pump
- Highlight: **mobile concrete placing boom, placing boom concrete pump, portable concrete placing boom**



Product Description

placing boom concrete pump placing placer boom concrete placing equipment Concrete Pouring Machine

By utilizing a concrete placing pump, construction sites can reduce the need for manual labor and additional equipment, streamlining the construction process and improving overall safety. The pumps also help to optimize resource allocation and minimize material waste, enhancing cost-effectiveness.

In summary, a concrete placing pump has transformed the way concrete is transported and placed in construction projects. Its ability to efficiently and precisely deliver concrete over long distances and to elevated heights has made it an indispensable tool for contractors and construction companies. With improved productivity, accuracy, and versatility, a concrete placing pump plays a crucial role in achieving high-quality results in a shorter timeframe, contributing to the success of construction projects.



| | | |
|-------------------------|------|------|
| Item | HG28 | HG32 |
| Max. Placing Radius (M) | 27.5 | 32 |

| | | |
|-----------------------------|-------------------------------|---------|
| Big Arm Length (M) | 12.6 | 14.5 |
| Big Arm Elevation (°) | 0-65 | 0-65 |
| Medium Arm Length (M) | 8.8 | 9.2 |
| Medium Arm Elevation (°) | 0-180 | 0-180 |
| Small Arm Length (M) | 6.1 | 8 |
| Small Arm Elevation (°) | 0-180 | 0-180 |
| Hose Length (M) | 3 | 3 |
| Concrete Delivery Pipe (Mm) | Ø125×6 | Ø125×6 |
| Tail Rotary Radius (M) | 3.9 | - |
| Total Power (Kw) | 5.5 | 15 |
| System Pressure (Mpa) | 24 | 24 |
| Rotary Speed (R/Min) | 0.3-0.8 | 0.3-0.8 |
| Rotary Range (°) | 0-360 | 0-360 |
| Lifting Speed (M/Min) | 0.65 | 0.65 |
| Lifting Height(M/Time) | ≤3.6 | ≤3.6 |
| Overall Height (M) | 12.6 | 22.9 |
| Bare Machine Weight (Kg) | 10720 | 16700 |
| Balance Weight(Kg) | 4×2000 | - |
| Control Mode | Panel/Wireless Remote Control | |



Hunan Sunny Intelligent Machinery Co.,LTD.



+86 19118921276



amy@hnsunny.com.cn



sunnyconcretebatchingplant.com

Construction Machinery Supporting Industrial Park, High-tech Zone, Ningxiang City, Hunan Province