




Concrete Placement Boom Spider Boom Concrete Pump

Basic Information

- Place of Origin: Hunan
- Brand Name: Sunny
- Model Number: HG28
- Minimum Order Quantity: 1 set
- Price: USD6000-10000 PER SET
- Delivery Time: 20-35DAYS
- Payment Terms: L/C, T/T, Western Union, MoneyGram
- Supply Ability: 50 SET PER MONTH

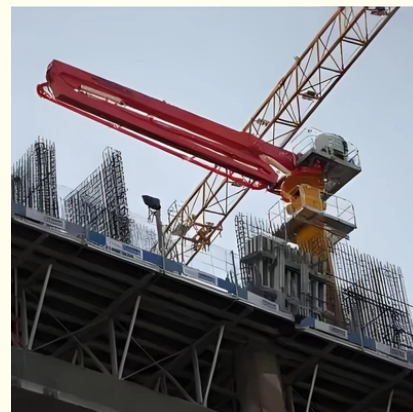

Product Specification

- Condition: New
- Warranty: 1 Year
- After-sales Service Provided: Engineers Available To Service Machinery Overseas
- Application: Construction Engineering
- Keyword: Concrete Pump
- Highlight: spider boom concrete pump, concrete placer boom, concrete placement boom



Product Description

concrete placing equipment concrete placer supplier placement boom Concrete Pouring Machine

Compatible with conventional tower section, higher usability;

High strength steel structure, components of reputable suppliers, high performance and reliable;

Optimized Design, Engineering and manufacturing with latest technical standard;

RZ form placing boom, flexible; wide placing range and no dead area;

High-level configuration electro-hydraulic elements make working more stably

Moreover, concrete placing pumps offer versatility in handling different types of concrete mixes, including low slump, high slump, and lightweight concrete. They can be used for a wide range of construction applications, such as foundations, slabs, walls, columns, and even high-rise structures. The pumps are capable of pumping concrete both horizontally and vertically, allowing for flexibility in placement options and accommodating projects with varying elevation levels.

By utilizing a concrete placing pump, construction sites can reduce the need for manual labor and additional equipment, streamlining the construction process and improving overall safety. The pumps also help to optimize resource allocation and minimize material waste, enhancing cost-effectiveness.





Item	HG28	HG32
Max. Placing Radius (M)	27.5	32
Big Arm Length (M)	12.6	14.5
Big Arm Elevation (°)	0-65	0-65
Medium Arm Length (M)	8.8	9.2
Medium Arm Elevation (°)	0-180	0-180
Small Arm Length (M)	6.1	8
Small Arm Elevation (°)	0-180	0-180
Hose Length (M)	3	3
Concrete Delivery Pipe (Mm)	Ø125×6	Ø125×6
Tail Rotary Radius (M)	3.9	-
Total Power (Kw)	5.5	15
System Pressure (Mpa)	24	24
Rotary Speed (R/Min)	0.3-0.8	0.3-0.8
Rotary Range (°)	0-360	0-360
Lifting Speed (M/Min)	0.65	0.65
Lifting Height(M/Time)	≤3.6	≤3.6
Overall Height (M)	12.6	22.9

Bare Machine Weight (Kg)	10720	16700
Balance Weight(Kg)	4×2000	-
Control Mode	Panel/Wireless Remote Control	



Hunan Sunny Intelligent Machinery Co.,LTD.

+86 19118921276

amy@hnsunny.com.cn

sunnyconcretebatchingplant.com

Construction Machinery Supporting Industrial Park, High-tech Zone, Ningxiang City, Hunan Province