

Construction Ready Mixed Concrete Batching Plant Factory Building Batching Machine

Basic Information

- Place of Origin:
- Brand Name:
- Model Number: HS
- Minimum Order Quantity:
- Price:
 - Packaging Details:
 - Delivery Time:
- Payment Terms:
- Supply Ability:
- HSZ120 ntity: 1 set USD 110000-150000/ SET container 25-30 days L/C, T/T, D/P, Western Union, MoneyGram 20 Set/Sets per Month



Product Specification

- Maaterial:
- Application:
- Control System:
- Productivity:
- Mixer:
- Warranty:
- Condition:
- After-sales Service Provided:
- Highlight:

- Cement, Crushed Stone, Sands And So On Building Works,Construction Projects,bridges,docks,airport
 - Automatic PLC Control, totally Automatic
 - ≤120m3/h

Hunan

SUNNY

- JS2000 Twin-shaft Concrete Mixer
- 12 Months
- New
- Engineers Available To Service Machinery Overseas,Online Support,Video Technical Support,Field Installation,commissioning And Training
 - mixed concrete batching plant, batching machine, batch mixing of concrete




Product Description

HZS120 Construction eady mixed concrete batching plant price for factory building Engineering & Construction Machinery HZS120 Fixed Concrete Batching Plant concrete mixing plant

Belt Conveyor Type Concrete Batching Plant mainly consists of 5 major systems such as mixer, material weighing system, material conveying system, material storage system and control system and other ancillary facilities. It is equipped with the storage, batching, conveying, stirring, control and other devices of various raw materials required for precast concrete, and various aggregates, powders, admixtures, water, etc. A complete set of equipment for supplying concrete in a concentrated manner than by a mixer.



Name of parameter	HZS60	HZS90	HZS120	HZS180	HZS240
Theoretical productivity	60 M3/h	90 M3/h	120 M3/h	180 M3/h	240m³/h
Model of mixer	JS1000	JS1500	JS2000	JS3000	JS4000
Mixing motor power	2x18.5Kw	2x30Kw	2x37Kw	2x55Kw	2*75Kw
Cycle period	60s	60s	60s	60s	60s
Volume of mixer	1000L	1500L	2000L	3000L	4000L
Unloading height	4.0m	4.0m	4.0m	4.0m	4.0m
Measuring range and precision of aggregate	(600- 2000)≤±2%	(700-2400)≤±2%	(1000- 3600)≤±2%	(1600- 4800)≤±2%	(1600- 4800)≤±2%
Measuring range and precision of cement	(300- 1200)≤±1%	(300-1200)≤±1%	600- 1800)≤±1%	(800- 2400)≤±1%	(800- 2400)≤±1%
Measuring range and precision of coal ash	(200- 600)≤±1%	(200-600)≤±1%	(300- 900)≤±1%	(400- 1200)≤±1%	(400- 1200)≤±2%

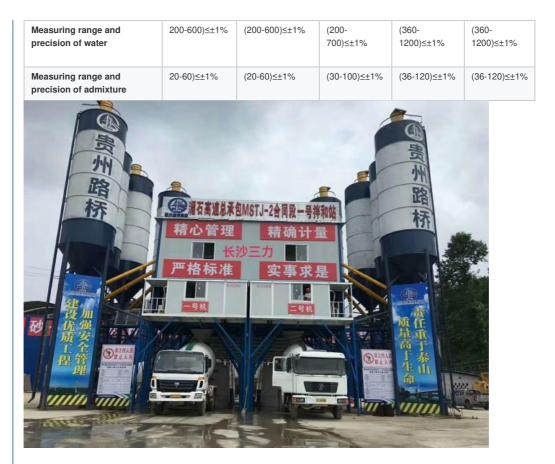

Features of concrete batching plant:

High Production Capacity: The HZS120 batching plant has a theoretical production capacity of 120 cubic meters per hour, making it suitable for large-scale construction projects. It can handle high volumes of concrete production, allowing for efficient and timely completion of projects.

Excellent Mixing Performance: The HZS120 batching plant is equipped with a twin-shaft concrete mixer, which ensures thorough mixing of aggregates, cement, water, and additives. The twin-shaft mixer operates at a high speed, promoting efficient mixing and delivering a homogeneous concrete mixture.

Advanced Control System: The HZS120 batching plant is equipped with a sophisticated control system, allowing for precise control and monitoring of the mixing process. The control system offers features such as automatic weighing, accurate dosing, and real-time data monitoring. It enables operators to adjust various parameters and ensures consistent and high-quality concrete output.

