




60m3 ready mix concrete batching plant production line

Our Product Introduction

for more products please visit us on sunnyconcretebatchingplant.com

Basic Information

- Place of Origin: Hunan
- Brand Name: SUNNY
- Model Number: HSZ60
- Minimum Order Quantity: 1 set
- Price: USD 110000-150000/ SET
- Packaging Details: container
- Delivery Time: 25-30 days
- Payment Terms: L/C, T/T, D/P, Western Union, MoneyGram
- Supply Ability: 20 Set/Sets per Month

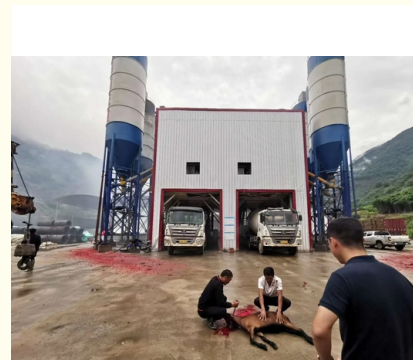

Product Specification

- Maaterial: Cement, Crushed Stone, Sands And So On
- Application: Building Works,Construction Projects,bridges,docks,airport
- Control System: Automatic PLC Control,totally Automatic
- Productivity: $\leq 60\text{m}^3/\text{h}$
- Mixer: JS1000 Twin-shaft Concrete Mixer
- Warranty: 12 Months
- Condition: New
- After-sales Service Provided: Engineers Available To Service Machinery Overseas,Online Support,Video Technical Support,Field Installation,commissioning And Training
- Highlight: **60m3 ready mix concrete batching plant, 60m3 concrete batching plant, ready mix concrete batching plant**



Product Description

High Efficiency 60m³/h Stationary Concrete Batching Plant Concrete Mixing Plant

Belt Conveyor Type Concrete Batching Plant mainly consists of 5 major systems such as mixer, material weighing system, material conveying system, material storage system and control system and other ancillary facilities. It is equipped with the storage, batching, conveying, stirring, control and other devices of various raw materials required for precast concrete, and various aggregates, powders, admixtures, water, etc. A complete set of equipment for supplying concrete in a concentrated manner than by a mixer.

pecification

Name of parameter	HZS60	HZS90	HZS120	HZS180	HZS240
Theoretical productivity	60 M ³ /h	90 M ³ /h	120 M ³ /h	180 M ³ /h	240m ³ /h
Model of mixer	JS1000	JS1500	JS2000	JS3000	JS4000
Mixing motor power	2x18.5Kw	2x30Kw	2x37Kw	2x55Kw	2*75Kw
Cycle period	60s	60s	60s	60s	60s
Volume of mixer	1000L	1500L	2000L	3000L	4000L
Unloading height	4.0m	4.0m	4.0m	4.0m	4.0m
Measuring range and precision of aggregate	(600-2000)≤±2%	(700-2400)≤±2%	(1000-3600)≤±2%	(1600-4800)≤±2%	(1600-4800)≤±2%
Measuring range and precision of cement	(300-1200)≤±1%	(300-1200)≤±1%	600-1800)≤±1%	(800-2400)≤±1%	(800-2400)≤±1%
Measuring range and precision of coal ash	(200-600)≤±1%	(200-600)≤±1%	(300-900)≤±1%	(400-1200)≤±1%	(400-1200)≤±2%
Measuring range and precision of water	200-600)≤±1%	(200-600)≤±1%	(200-700)≤±1%	(360-1200)≤±1%	(360-1200)≤±1%
Measuring range and precision of admixture	20-60)≤±1%	(20-60)≤±1%	(30-100)≤±1%	(36-120)≤±1%	(36-120)≤±1%



Hunan Sunny Intelligent Machinery Co.,LTD.



+86 19118921276



amy@hnsunny.com.cn



sunnyconcretebatchingplant.com

Construction Machinery Supporting Industrial Park, High-tech Zone, Ningxiang City, Hunan Province